





NO<sub>x</sub> | NO | NO<sub>2</sub> | CO | CO<sub>2</sub> | SO<sub>2</sub> | N<sub>2</sub>O | CH<sub>4</sub> | HC as C<sub>3</sub>H<sub>8</sub> | O<sub>2</sub>

# MGAprime Q

Portable  
emissions analysis.



**Verified and certified according to EN 15267 sheets 1, 2 and 4.**

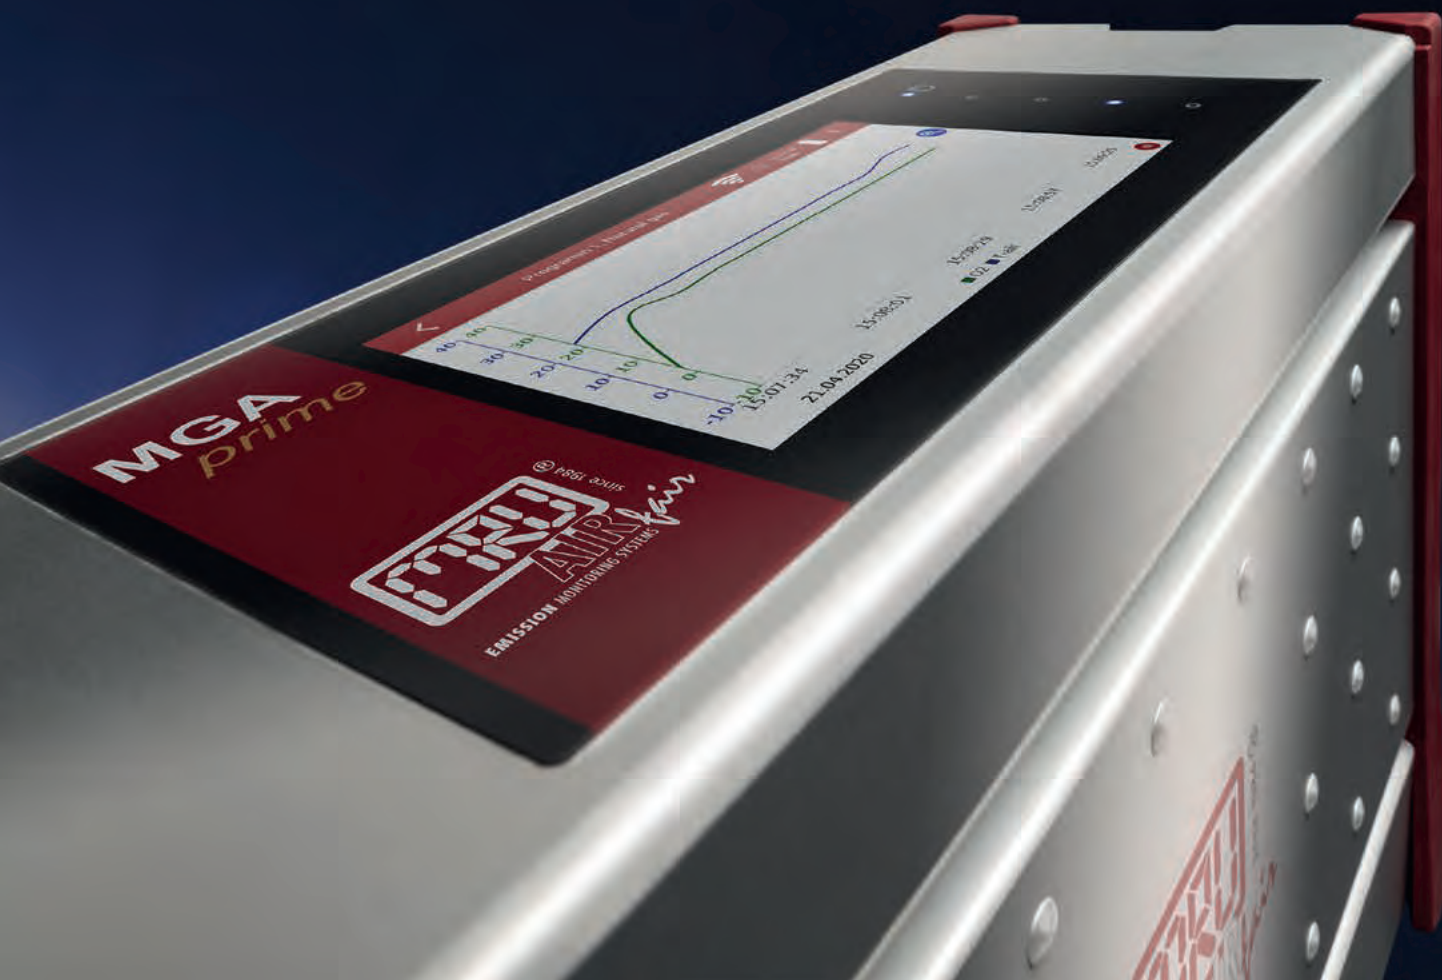



# MGAprime Q

## Certified for official measurements

### We offer you these special advantages:

- duration of measurement, interval and averaging can be set by user, measured value display also possible as a curve chart
- Lithium-ion battery operation, including gas cooler and measurement, but without heated hose
- Data transmission LAN, WiFi, USB, RS 485, analog as well 400 MB internal data storage
- gas conditioning according CEN/TS-17021
- CH<sub>4</sub> cross sensitivity compensation to SO<sub>2</sub>
- O<sub>2</sub>-measurement by means of standard reference method paramagnetic EN 14789



Tested AMS  
Regular  
Surveillance


www.tuv.com  
ID 000072196



Sira  
Certificate  
No.  
MC200366/00


# The device in detail

## An overview of the special features

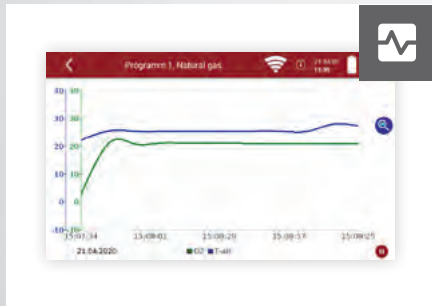

### Practical touch display

High resolution 7" color display with graphical output of the measured values

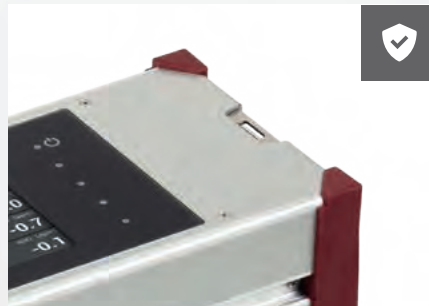

### Optimal protection

All-metal housing with soft bumper corners for the harsh industrial everyday use



### Comfortable size

Very compact dimensions (W x H x D: 460 x 330 x 200 mm) and light weight (15 kg) including nylon pouch, IP 42



### Well protected during transport

(room for analyser and nylon bag)

### On the go

Handy nylon IP42 protective bag (part of the certification)

# Operation and interfaces


## Simple and clear

### Operating options




#### Touchscreen

Device operation via the 7" touch/swipe display, resolution 800 x 480 px, 750 cd/m<sup>2</sup>

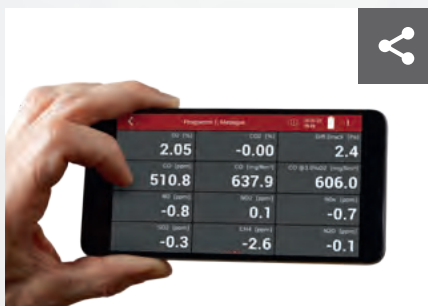

#### Contactless

Operation via smartphone or PC via VNC connection, mirrored device display on smartphone

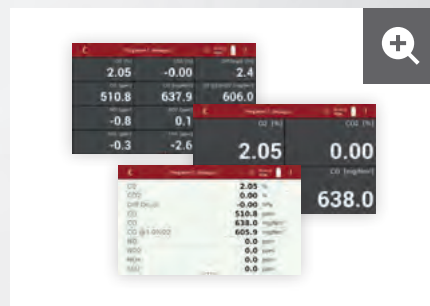


#### Zoom function

Variable display modes for the display

### Connections and interfaces

#### Measuring technology

#### Data communication

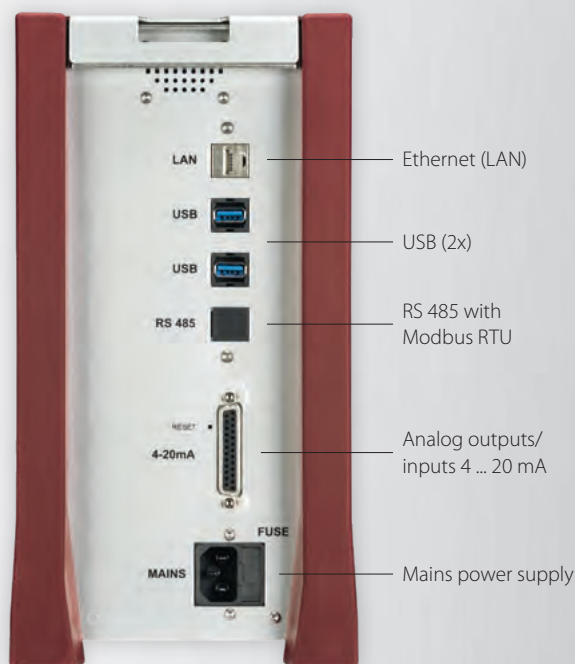

# The gas conditioning

## An overview

### Gas sampling probe

- Robust industrial probe with heated hose
- Equipped with probe tube Ø12/300 mm (changeable)
- Also for exhaust gas temperature measurement
- Heated gas sampling line (3 m)
- Easy to change filter in the probe head
- Filters can be filled with different material, depending on the amount of dirt



Effective filter system, quickly exchangeable by the user, filled with:

- Glass wool for high amounts of dirt
- Filter sleeve for little dirt



### Double stage gas cooler

- Keeps sample gas at a constant dew point of 4 °C
- Constant dew point compensates the cross sensitivity of water on the measured gas components
- Automatic condensate delivery



### Gas pump

- Powerful pump for use with high negative pressure
- Regulation on low, constant flow volume to increase in filter life
- High contamination alarm of the filter



### Phosphoric acid dosage

- Controlled injection of 10% phosphoric acid for reliable, precise measurement of SO<sub>2</sub> and NO<sub>2</sub>

# Data transmission and measurement

## The technology behind


### Data transmission

#### Fully equipped standard device:


- Ethernet (LAN) TCP/IP
- WiFi
- 8 analog outputs 4 ... 20 mA
- 4 analog inputs
- USB (2x)
- RS 485

#### Internal data storage:


The huge memory with 400 MB offers space for thousands of facilities and data sets.

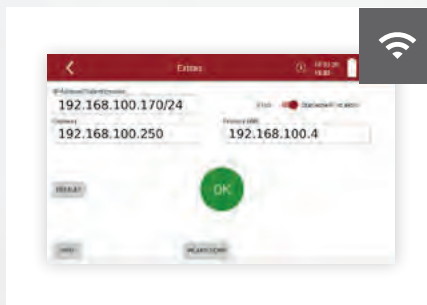


Set LAN

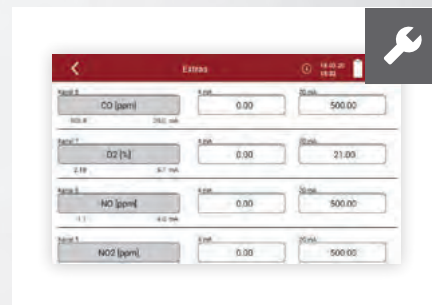

Set analog outputs

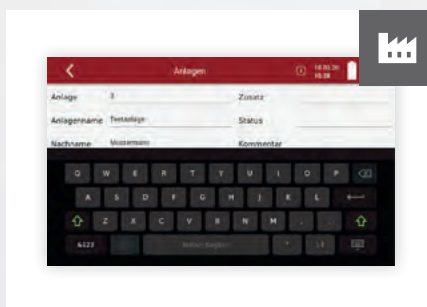

Manage facilities

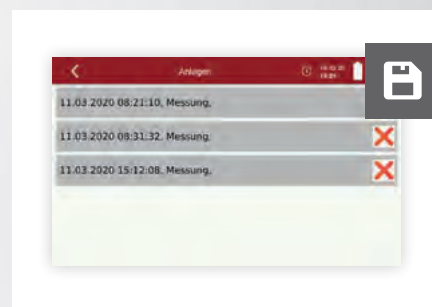


Save measurements by facility

### High quality measurement technology

The optimized NDIR measurement technology of the *MGPrime Q* guarantees standard-compliant measuring ranges and accuracies without zero point drift.

#### 8 channel NDIR module

NO, NO<sub>2</sub>, CO, CO<sub>2</sub>, SO<sub>2</sub>,  
N<sub>2</sub>O, CH<sub>4</sub>, HC as C<sub>3</sub>H<sub>8</sub>

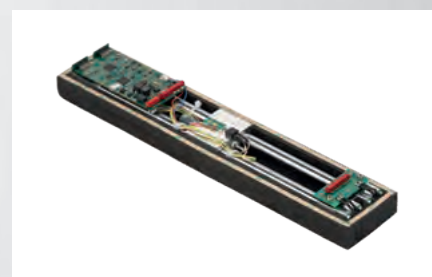

Double tube infrared module for gas analysis

### Equipment

- Paramagnetic O<sub>2</sub> analysis
- Differential pressure measurement ± 120 hPa
- Temperature measurement of flue gas (1,100 °C) and combustion air (100 °C)
- Flow rate measurement and volume flow calculation



Paramagnetic sensor for O<sub>2</sub> according to EN 14789

# Practical accessories

## For more flexibility



### Pitot tubes for flow velocity measurement

- L-type or S-type with temperature measurement (up to 1,000 °C), length: 300 ... 1,500 mm
- Measuring ranges from 3 to 100 m/s at a resolution of 0.1 m/s
- Additional calculation of the volume flow (m<sup>3</sup>/s)



### USB to Bluetooth converter set / USB to WLAN converter

- wireless data transfer to PC/ notebook with MRU4win
- WiFi for short distance and Bluetooth for up to 300m



### PC software "MRU4Win"

- Software for Windows to visualize measure data, manage, export and print
- Connect multiple devices at the same time and read out live values
- Logging and saving live values
- Database with customer contacts, attachments and manage users
- Export measurement reports as PDF
- Documents with customized logo and print out the address
- Read out data storage, save measurements, print and save as PDF



### WiFi printer

- With lithium-ion battery and USB socket
- Suitable for 80 mm paper width



### Dosage unit for phosphoric acid

- Controlled dosage and injection of 10% phosphoric acid for reliable, precise measurement of SO<sub>2</sub> and NO<sub>2</sub> according CEN/TS-17021

# MGAprime Q

## Technical data

Gas measurement (NDIR)	Measuring range min./max.	Certified range min./max.	Resolution	Repeatability*	8h-Drift*	Linearity
Nitric monoxide (NO)	0 ... 200/4,000 ppm	0 ... 200/2,000 ppm	0.1 ppm	2 ppm or 1 % reading	2 ppm or 1 % reading	1 % m. r.
Nitric dioxide (NO <sub>2</sub> )	0 ... 150/1,000 ppm	0 ... 150/500 ppm	0.1 ppm	1 ppm or 1 % reading	2 ppm or 1 % reading	1 % m. r.
Sulphur dioxide (SO <sub>2</sub> )	0 ... 150/4,000 ppm	0 ... 150/3,000 ppm	0.1 ppm	2 ppm or 1 % reading	2 ppm or 1 % reading	1 % m. r.
Carbon dioxide (CO <sub>2</sub> )	0 ... 40 %	0 ... 20 Vol.%	0.01 Vol%	0.2 % or 1 % reading	0.2 % or 1 % reading	1 % m. r.
Carbon monoxide (CO)	0 ... 175/10,000 ppm	0 ... 175/3,000 ppm	0.1 ppm	2 ppm or 1 % reading	2 ppm or 1 % reading	1 % m. r.
Nitrous oxide (N <sub>2</sub> O)	0 ... 100/500 ppm	0 ... 100/250 ppm	0.1 ppm	2 ppm or 1 % reading	2 ppm or 1 % reading	1 % m. r.
Methane (CH <sub>4</sub> )	0 ... 500/10,000 ppm	—	0.1 ppm	10 ppm or 1 % reading	2 ppm or 1 % reading	1 % m. r.
Propane (C <sub>3</sub> H <sub>8</sub> )	0 ... 200/5,000 ppm	—	0.1 ppm	2 ppm or 1 % reading	2 ppm or 1 % reading	1 % m. r.

Gas measurement (PM)	Method <sup>1</sup>	Measuring range	Resolution	Accuracy
Oxygen (O <sub>2</sub> )	PM	0 ... 25 %	0,01 %	0,1 %

Other measurements	Method	Measuring range	Resolution	Accuracy*
Stack gas temperature (T <sub>gas</sub> )	NiCrNi	0 ... 1,100 °C	1 °C	± 2 °C or 1 % reading
Ambient air temperature (T <sub>amb</sub> )	NiCrNi	0 ... 100 °C	1 °C	± 1 °C or 2 % reading
Differential pressure (P-Druck)	Piezoresistive	-120 ... +120 hPa	1 Pa	± 2 Pa or 1 % reading
Flow velocity measurement (v)	Pitot	3 ... 100 m/s	1 m/s	± 1 m/s or 1 % reading
Standardized ext. signal (AUX connection)	software	for K-thermocouple, 0 ... 10 Vdc, 4 ... 20 mA, RS 485		
Combustion calculations (fuel type depend.)	software	Losses, ExcAir, Air Ratio, dew point		
Emission calculations	software	mg/Nm <sup>3</sup> , reference to O <sub>2</sub>		

General technical data	
Operating system	LINUX
Display, operation	7" TFT (800 x 480 px) colour display, backlit, with touch pad
Data storage type	dynamic, internally 10,000 data sets. Internally stored data can be exported to USB-stick
Interface to PC/notebook	Ethernet, WiFi, RS 485
Cable/wireless communication interface	RS 485, RJ45 (Ethernet), WiFi
Printer	external USB/WiFi printer
Analog output/input 4 ... 20 mA	8 channel out, 4 channel in, user configurable
Universal analog input (AUX)	0 ... 10 Vdc, 4 ... 20 mA, NiCrNi-thermocouple, RS 485
System warm up time	30 minutes, typical
Mains free operation time	Li-Ion, 96 Wh, for standby 1 hour
Operating conditions	+5 ... +40 °C; RH up to 90 % non condensing
Storage temperature	-20 ... +50 °C
Power supply	86 ... 265 Vac, 47 ... 63 Hz, 105 W (up to 600 W with heated gas sample line)
Protection class	IP42 inside transport case
Dimensions (W x H x D)	430 x 290 x 150 mm
Weight	approx. 15 kg only device, approx. 10 kg bag with accessories

**MRU – Competence in gas analysis. For over 35 years.**

### MRU · Messgeraete fuer Rauchgase und Umweltschutz GmbH

Fuchshalde 8 + 12  
74172 Neckarsulm-Obereisesheim  
Phone +49 7132 99620 · Fax +49 7132 996220  
info@mru.de · www.mru.eu

MRU representative:

