



## Gasurveyor 700 - H<sub>2</sub>

*Natural Gas & Hydrogen detection in one instrument.*



### Ensuring compliance

Intelligent data-logging functionality together with optional GPS mapping simplifies data gathering.

### Natural gas discrimination

Quickly determines the source of gas leaks, whether it's pipeline gas or naturally occurring biogas; saving valuable time and reducing detection related costs.

### Application ready

Highly configurable to our customers' gas detection needs, providing flexibility of use without compromising on performance.

Application modes include:

- Combustible Gas Indicator
- Purge
- Barhole
- Pipeline Gas Test (PGT)
- Search


### Additional Features

- PPM, LEL & Volume capability
- Combined or individual LEL readings for Natural Gas and Hydrogen
- Barhole Mode
- Soft-key Operation
- Communication: IrDA & Bluetooth (optional)
- 360° Alarms
- Lightweight & Rugged
- Ingress Protection - IP55
- Alkaline or Rechargeable battery options




# Gasurveyor 700 - H<sub>2</sub>

The GS700 is a configurable combination instrument that fully meets the needs of gas utilities. The large display simplifies operation and allows the user to access multiple functions.

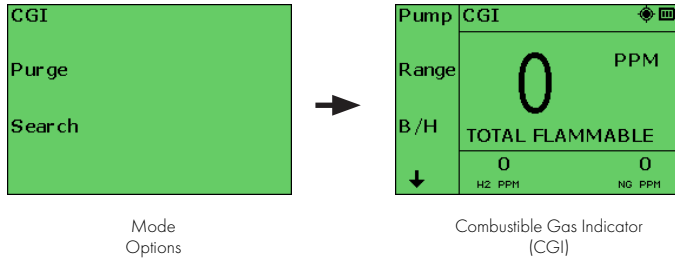


## Combined or individual measurements

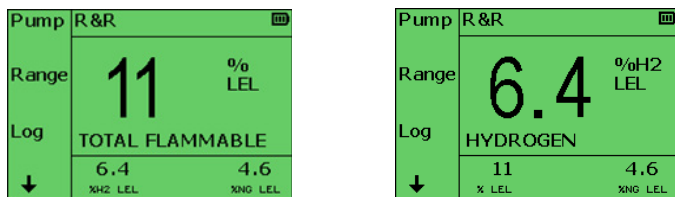

## Pipeline Gas Test (PGT)

Is the gas coming from your pipeline?  
Avoid unnecessary excavations with this invaluable feature. Instantaneous confirmation that the gas is not from your pipeline (e.g. landfill or swamp gas). Simple user interface:

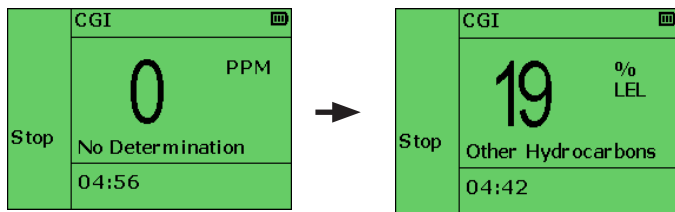

## Barhole Mode

Barholing allows underground leaks to be located. The GS700 incorporates a mode that allows compliant and consistent barholing.

Features include:

- Fixed time sampling
- Peak & Sustained readings displayed
- Simple user menu to view previous reading
- Datalogging - including location data



Charger Cradle

Technical Specification	
Size:	190 x 98 x 107 mm
Weight:	1.4 kg (Alkaline), 1.3 kg (Rechargeable)
Display:	Monochrome LCD with automatic backlighting
Temperature:	-20°C to +50°C (-4°F to +122°F)
Humidity:	0 - 90% RH non-condensing
Sampling:	Integral pump with flow fail sensor +sample path is protected by a hydrophobic & cotton filter
Alarms:	360° Highly visible flashing LED Sounder ~ 85 dB at 0.3 m
Datalogging:	Capacity: 500 session logs Session log: user ID, date & time, gas readings, alarms, calibration / bump test data, barhole data, PGT logs » Log Extraction: Infrared or Bluetooth (optional) » Location data via GPS (optional)
GPS:	Logs the GS700 location (optional). Extracted location data is stored with a date / time stamp.
Battery:	3 x LR20 'D' size Alkaline Cells or Rechargeable Battery Pack
Battery Life:	Typically: 15 hrs Alkaline, 20 hrs Rechargeable
Charge Time:	Typically: 6 hrs
Construction:	Antistatic Polycarbonate ABS with conductive TPE over-moulding
Rating:	IP55 (Protected from Dust & Water Jets)
Certification:	IECEEx / ATEX   II 2G (Ta = -20°C to +50°C) Ex db ia IIC T4 Gb
Warranty:	2 years

Sensor Specification				
Gas	Range	Resolution	*T90	Sensor Type
HC	0-10,000ppm	25ppm	-	Infrared
HC	0-9.9% LEL	0.1%	<6s	Infrared
	10-100% LEL	1%		
HC	0-100% Volume	1%	<6s	Infrared
H <sub>2</sub>	0-10,000ppm	1ppm	-	Cat bead
	0-9.9% LEL	0.1%	4s	
	10-100% LEL	1%		
H <sub>2</sub>	0-100% Volume	1%	4s	Thermal Conductivity
	PGT	Decision made if sample: > 1.5% Volume		

As an ISO 9001 approved company, Teledyne GMI Ltd quality assurance programmes demand the continuous assessment and improvement of all Teledyne GMI Ltd products. Information in this leaflet could thus change without notification and does not constitute a product specification. Please contact Teledyne GMI Ltd or their representative if you require more details.



**Americas**  
14880 Skinner Rd  
Cypress, TX 77429, USA  
Tel.: +1 713-559-9200  
Fax: +1 281-746-3064

**Emea**  
Inchinnan Business Park  
Renfrew, PA4 9RG  
Scotland, UK  
Tel: +44 (0)141 812 3211

**Asia Pacific**  
Room 04, 9th Floor, 275 Ruijing  
Road, Xuhui District, Shanghai,  
China  
TGFD\_APAC@teledyne.com